

FIRE ASS SERIES





# L1 LINEAR FIREPLACE

Please refer to the complete L1 (1500I) product manual before installation

#### L1 FIREPLACE COMPONENTS

S	1500IN	Direct Vent L1 Series Engine NG			
ENGINES	1500IP	Direct Vent L1 Series Engine LPG			
	1500NGK	Conversion Kit to NG			
	1500PGK	Conversion Kit to LPG			
FUEL	1505DWK	Long Beach Fire - Driftwood and River Rock			
	1510DGM	Murano Decorative Glass Fire - (Black & Azura Decorative Glass)			
	1512MBS	Murano Beaded Glass Fire - (Clear Beaded Glass)			
LINERS	1515FBL	Fluted Black Liner Set			
	1520FSL	Fluted Sand Liner Set			
	1525EBL	Enamel Black Liner Set			
0	1550LSB	3.5" Surround - Black			
Œ	1550LSZ	3.5" Surround - Bronze			
SURROUNDS/ACCESSORIES	1550LSP	3.5" Surround - Brushed Nickel			
	1555LFB	Finishing Trim Black - 1"			
	1560LSG	Barrier Screen (Recommended)			
	1565LLK	Lighting Kit			
	1595CFK	Circulating Fan Kit			
	GV60BRK	Bedroom Kit - with automatic 1 hour shutdown			
- RO	GV60NTK	Valor EasyFire handheld remote control (turn pilot on/off & adjust flame)			
J.	1265WSK	Valor Wall Switch Kit - Standard with purchase			
S	1270RBK	Valor Remote Blower Kit			


DEL	Model	Fuel	Max. Input BTU/hr	Min. Input BTU/hr	EnerGuide Rating**	AFUE++	Max. Output** (w/out fan) BTU/hr
MODEL /FUEL	1500IN	NG	30,000	16,000	65.77%	67.57%	21,705
	1500IP	LPG	28,000	15,000	66.45%	67.69%	20,409

<sup>\*\*</sup> EnerGuide Ratings and Outputs have been determined without a fan/blower, using the CSA P.4.1-02 test method ++ A.F.U.E. (Annual Fuel Use Efficiency) tested as per 10CFR - 430.23


Certified to ANSI Z21.88 / CSA 2.33 Vented Gas Fireplace Heater Standard


### L1 PRODUCT DIMENSIONS

46" (1168 mm) 42" (1067 mm)

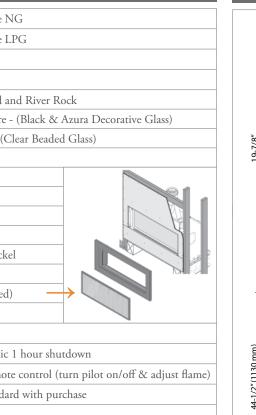

44-1/2"(1130 mm) to top of cement board 43"(1092 mm) to underside of header	Header Center of vent
to top 43" to undd	33-1/8"(6





ABOUT OUR EFFICIENCY RATINGS - All Valor product literature is published using recognized Canadian and US government test methods for determining energy efficiency performance. This ensures our products will perform in your home as rated. Beware of misleading "steady state" efficiency claims made by manufacturers using their own "in-house" test methods. For example - a large difference between an Energuide rating and a "steady state efficiency" may indicate misleading efficiency claims. Visit valorfireplaces.com for more information.
















Copyright Miles Industries Ltd. 2012 Proudly made in North America

Printed on recycled paper

All product information is accurate at time of printing and is subject to change. Please Note: Printed images may vary from actual product.

CAN 1-2. 17 Gas Fired Appliances For Use at High Altitude



#### LINEAR DESIGN MEETS VALOR PERFORMANCE

Showcasing leading edge design, quality finishes and high efficiency, the L1 Series combines Valor's proven performance with the latest in linear design.

A highly effective radiant and convective heater, the L1 raises "decorative widescreen" fireplace standards. Low turndowns provide hours of comfort, efficiently distributing warmth where you want it - when you want it.

#### VALORSTAT PLUS REMOTE CONTROL - STANDARD FEATURE



Easily select, adjust and program the desired temperature that you want, saving energy and lowering your overall home heating costs.

**Pilot On Demand:** Turn your pilot light **ON** and **OFF** from the handheld remote for years of additional energy savings.

In addition to the ValorStat Plus remote the **Wall Switch Kit** (a standard feature) provides secondary fireplace control.

#### NO POWER, NO PROBLEM

Engineered to circulate air through natural convection, the L1 is highly efficient without a fan - providing reliable heat, even during a power failure.

#### **USE RADIANT HEAT SAFELY**

Fireplace surfaces, in particular the glass viewing window, are extremely hot during operation and will remain hot for a period of time after the fireplace is turned off. Contact with the hot glass can cause severe burns. If small children are present, close adult supervision is required. The 1560LSG barrier screen option (shown left) and/or approved child barrier is strongly recommended.

For more information visit www.valorfireplaces.com/safety.



## LONG BEACH FIRE

520FSI Fluted Sand Liner & 1550LSZ 3.5" Surround in Bron



1505DWK Long Beach Fire

1515FBL Fluted Black Liner & 1550LSB 3.5" Surround in Black



1505DWK Long Beach Fire

1505DWK Long Beach Fire

1525EBL Enamel Black Liner & 1555LFB 1" Finishing Trim in Bla

Over time, coastal shores form natural landscapes. Changing tides welcome dramatic weather, continuously evolving unique ecosystems. The Long Beach fire portrays raw, coastal elements, welcoming you to a state of warmth and relaxation.

"Fire on water" inspired the Murano design - a tribute to centuries of Italian artisan glassmakers. Black and azura decorative glass illuminates flames within, casting reflections on a stunning glass base (1510DGM).

Murano fire also available in a clear beaded glass design (1512MBS - bottom right image).



### MURANO GLASS FIRES



1510DGM - Murano Decorative Glass Fire with Glass Base



1510DGM - Murano Decorative Glass Fire with Glass Base
1515FBL Fluted Black Liner & 1550LSB 3.5" Surround in Black



1512MBS - Murano Beaded Glass Fire

1525EBL Enamel Black Liner & 1550LSP 3.5" Surround in Brushed Nicke