


L1 OUTDOOR LINEAR FIREPLACE COMPONENTS

ENGINES	1500INO	Direct Vent L1 Outdoor Series Engine NG	
	1500IP0	Direct Vent L1 Outdoor Series Engine LPG	
FUEL BEDS	1500DGS	Decorative Glass Set	
	1505DWK	Long Beach Driftwood Kit	
	1510DGM	Murano Decorative Glass Kit	
LINERS	1515FBL	Fluted Black Liner	
	1520FSL	Fluted Sand Liner	
	1525RGL	Reflective Glass Liner	
SURROUNDS	1555LFB	1" Adjustable Finishing Trim Kit - Black Powder Coat	
ACCESSORIES	658DVK2	Direct Vent Terminal - coaxial terminal with wall thimble	
	1265WSK	Wall Switch Kit (included with fireplace!)	
	1506DRK	Decorative Rock Kit (optional accessory to the 1505DWK)	
	GV60NTK	Non-Thermostat Handset	

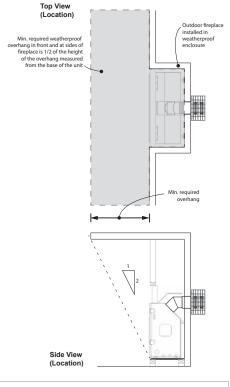

Wall Switch Kit - included with fireplace

MODEL/FUEL

Model	Fuel	Max. Input BTU/hr	Min. Input BTU/hr
1500INO	NG	30,000	18,000
1500IP0	LPG	28,000	18,500

Certified to ANSI Z21.88-2014/CSA 2.33-2014 Vented Gas Fireplace Heater American National Standard CGA - 2.17-91 Gas Fired Appliances for use at High Altitudes

Please Note: All product information is accurate at time of printing and is subject to change. Printed images may vary from actual product. Refer to the L1 Outdoor engine manual (1500IN0/IP0) for product installation. For more information visit valorfireplaces.com

FIREPLACE SAFETY - USE RADIANT HEAT SAFELY

Fireplace surfaces, in particular the glass viewing window, are extremely hot during operation and will remain hot for a period of time after the fireplace is turned off. Contact with the hot glass can cause severe burns. Close adult supervision is required if there are young children, or at-risk individuals in the house.



Included with your purchase, a Valor Barrier Screen is recommended at all times. Install an approved aftermarket safety gate to keep toddlers, young children and at-risk individuals a safe distance from the fireplace. For more information please visit www.valorfireplaces.com/safety.





Your Authorized Valor Dealer BRL10D15E - June 2015









